Α

FIFF - 84-14 GRIO - 2234 **८14-172 ₹,6²** 9072485109 P.01

> O.M.B. NO. 3067-0077 Expires May 31, 1996

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

Instructions for co	mpleting this:	form can be found on th	ie following pag	jes.				
SECTION A PR		FOR INSURANCE COMPANY USE						
BUILDING OWNERS NAME JOHN + LISA PH		POLICY NUMBER						
STREET ADDRESS (Including Apt., Unit. Suite and/or 8149.)		COMPANY NAIC NUMBER						
OTHER DESCRIPTION (Lot and Block Numbers, etc.) LOT 3 DELRIDGE								
ANCHORAGE		ALASKA 21P CODE						
	LOOD INSURA	NCE RATE MAP (FIRM)	INFORMATION					
Provide the following from the proper FIRM (See	Instructions):							
1, COMMUNITY NUMBER 2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5 FIRM ZONE	8. 84\$E FLOOD ELEVATION (in AO Zones, use depth)				
020005 0243	C	3/5/1990	Al	175-7				
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 ArOther (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: [[]] . [] feet NGVD (or other FIRM datum—see Section B, Item 7).								
SECTI	ON C BUILD!	NG ELEVATION INFORM	IATION					
2(a). FIRM Zones A1-A30, AE, AH, and A (with It of 1778 Per Indicate the elevation datum system used in dunder Comments on Page 2.) 2(a). FIRM Zones V1-V30, VE, and V (with BFE) the selected diagram, is at an elevation of L (c). FIRM Zone A (without BFE). The floor used below (check one) the highest grade as the reference one) the highest grade adjacent to the build level) elevated in accordance with the common of the FIRM (see Section B, Item 7), then converged to the equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM.	RM datum-see The bottom of th	Section B, Item 7). of the lowest horizontal strict feet NGVD (or other FIR nee level from the selected diagram is a depth number is available ain management ordinance above reference level elem used in measuring the ensity the datum system use.	uctural member of datum—see See didiagram is feet at the building' se? Yes vations: NGV levations is differed on the FIRM.	of the reference level from ection B, Item 7). I lefeet above or ove or below (check s lowest floor (reference No Unknown TO "29 Other (describe rent than that used on				
 The reference level elevation is based on: (NOTE: Use of construction drawings is only case this certificate will only be valid for the buwill be required once construction is complete.) 	valid if the build ilding during th)	ding does not yet have the e course of construction	reference level (A post-construct	ion Elevation Certificate				
i. The elevation of the lowest grade immediately adjacent to the building is: 1178.0 feet NGVD (or other FIRM datum-see Section B, Item 7).								
Şı	ECTION D CC	MMUNITY INFORMATIO	N					
If the community official responsible for verifying is not the "lowest floor" as defined in the community of the start of construction or substantial.	nunity's floodpli	ain management ordinand IGVD (or other FIRM datu	e, the elevation of	of the building's "lowest				


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

Learnly that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

		LICENSE N	UMBER (or	Aftix Scall		
CENTIFIERS NAME KIENNETH L. DREYER	<u> </u>		<u> </u>	8202		
713 E		Y NAME	INC.			
SEC/TRES	CITY				STATE	CO ZIP
440 WEST BENSON T	0:3	ANCHO	RAGE	AUA	15K-A	77500
SIGNATURE Con / //		9/2	9/94	PHONE	907	562-5291
Copies should be made of this Certificate for: 1) con	mmunity o	fficial, 2) insu	rance age	nt/company, ai	nd 3) build	ing owner.
COMMENTS: VERTICAL DATUM	15	GREAT	TER	ANCHO	RAGE	AREA
COMMENTS: VERTICAL COLLA	VE	11.5.	CO	ASTAL	AND	
BOROUGH, POST QUAL BEODETIC SURVEY	M 15	A.J 5	EA	LEVEL	OF	1972
- GEONETIC SURVEY		17	<u></u>			,
	<u> </u>					

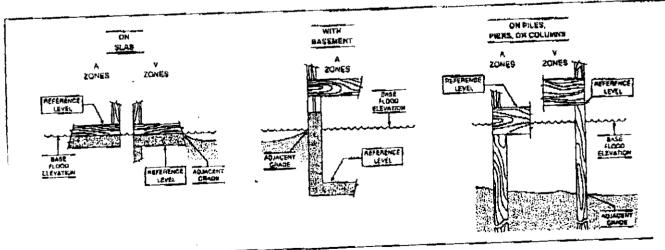

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.