O.M.B. NO. 3067-0077 Expires May 31, 1996

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

014-254-09

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to crovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE								
BUILDING OWNER'S NAME	POLICY NUMBER								
T. J. Homes Inc.									
STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg, Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER								
8501 Atkins Place, Anchorage, Ak 99507 OTHER DESCRIPTION (Lot and Block Numbers, etc.)									
Wingate Lot 9	· ·								
Anchorage, Alaska 99507	E ZIP CODE								
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION									
Provide the following from the proper FIRM (See Instructions):									
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM 2	ONE 6. BASE FLOOD ELEVATION (in AO Zones, use dapin)								
020005 0243 C 3/1990 A-1	1								
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE):NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).									
SECTION C BUILDING ELEVATION INFORMATION									
describes the subject building's reference level 6. 2(a) FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the solid of 200. The top of the reference level floor from the solid of 200. The top of the reference level floor from the solid of 200. The top of the reference level floor from the solid of 200. The floor used as the reference level from the selected diagram is below (check one) the highest grade adjacent to the building. (d) FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available, is the building slevel) elevated in accordance with the community's floodplain management ordinance? Yes Indicate the elevation datum system used in determining the above reference level elevations is the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the	mber of the reference level from see Section B, Item 7). Is feet above or leet above or below (check ilding's lowest floor (reference s No Unknown NGVD '29 \begin{align*} Other (describe is different than that used on								
equation under Comments on Page 2.)	THE SHOP THE CONTROL OF								
4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)	•								
5. The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference case this certificate will only be valid for the building during the course of construction. A post-conwill be required once construction is complete.)	struction Elevation Certificate								
6. The elevation of the lowest grade immediately adjacent to the building is: 2.05.1 feet N Section B, Item 7).	GVD (or other FIRM datum-see								
SECTION D COMMUNITY INFORMATION									
If the community official responsible for verifying building elevations specifies that the reference is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation is as defined by the ordinance is:	ation of the building's "lowest								


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME			LICENSE NUMBER (or Affix Seal)						
Kim	NOTH G.	Lance	5202-15						
TITLE REGIS	NUTH G.	d Surve	YOR	NAME					
ADDRESS	1 GEVREUS		OITY .	Auchorage,	LLASKA	STATE 225	ZIP		
SIGNATURE	,			11/28/97	PHONE	(907) 34	5-6476		
Copies should	be made of this C	ertificate for: 1) community off	icial, 2) insurance ag	ent/company, an	d 3) building o	wner.		
COMMENTS: _	DATUM	s GREA	TOR ANCH	DRAGE APUSA	Bornigh	, Post Qu	JAKE,		
COMMENTO: _	U.S. Cops			iring, Mis					
	SAME AS	FIRM.		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \					
				<i>2</i> - 4					
							<u> </u>		

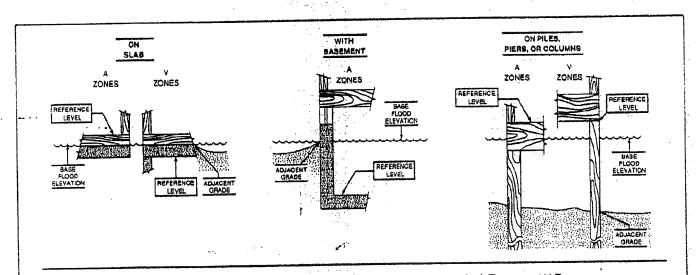

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.