

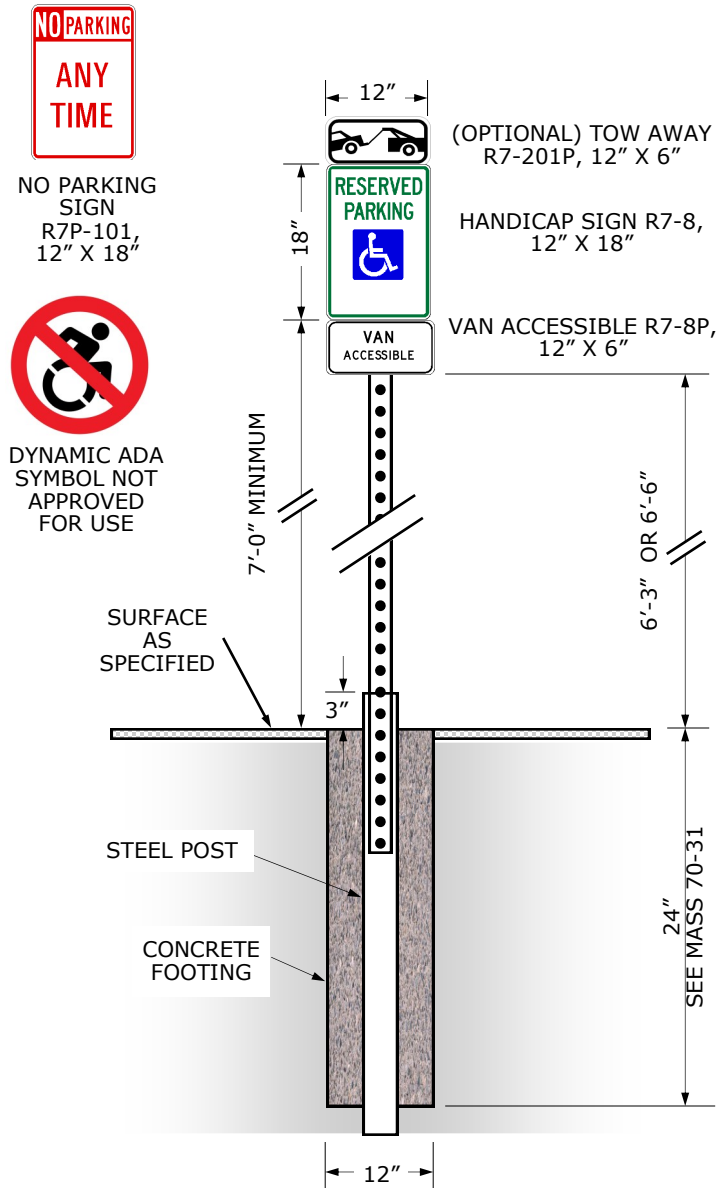


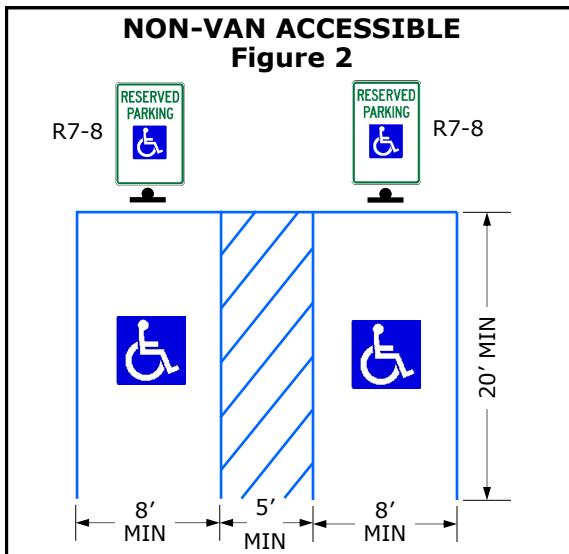

# MUNICIPALITY OF ANCHORAGE TRAFFIC DEPARTMENT HANDICAP PARKING SIGN DETAIL

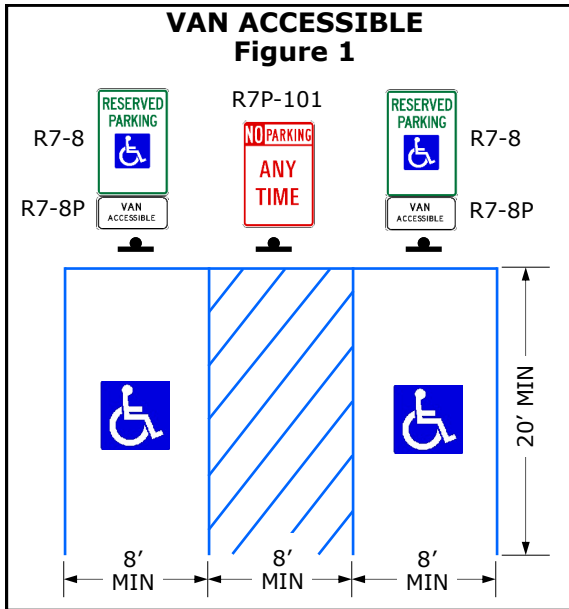

SIGNS CAN BE MOUNTED ON A BUILDING PROVIDED THEY ARE NOT OBSTRUCTED FROM VIEW. MOUNTING HEIGHT ON BUILDINGS IS 5 FEET MIN.

SIGNS SHALL NOT BE MOUNTED ON DOORS OR WINDOWS AND CAN NOT BE MORE THAN 10 FEET FROM THE EDGE OF THE PARKING STALL.

ALL HANDICAP SPACES SHALL HAVE A HANDICAP SIGN. THE HANDICAP SIGNS SHALL BE CENTERED ON 8 FOOT PARKING STALL (FIGURE 1).

INSTALL A "NO PARKING" SIGN CENTERED AT THE FRONT OF THE 8 FOOT WIDE VAN ACCESSIBLE ACCESS AISLE (FIGURE 1).

NON-VAN ACCESSIBLE SPACES REQUIRE A 5 FOOT AISLE WIDTH (FIGURE 2).

AN ACCESS AISLE CAN BE SHARED BY 2 HANDICAP SPACES.

THE FIRST HANDICAP SPACE IN EVERY 8 PROVIDED HANDICAP SPACES MUST BE A VAN ACCESSIBLE SPACE.

ALL ACCESSIBLE SPACES/AISLES/CURB SHALL BE 4" BLUE STRIPES PER M.U.T.C.D. SPECIFICATIONS.